



Reliable Productivity and Safety in Filling Machines

LSC

PLUG & FILL SERIES

16.500 €*

Basic filling machine for filling liquid and viscous products in IBC from 800 liters to 1.500 liters, completely automatically and safely for the operator.

**Price of the non ATEX Filling Machine. Packaging and transport not included.*


Main features:

- ✓ Fully automatic double flow filling (gross/fine) with automatic tare control in each cycle.
- ✓ Simple and intuitive setup.
- ✓ Fully automatic filling quality control at the end of each filling cycle to ensure that the required tolerances are fulfilled.
- ✓ Potential free contacts for pump control or recirculation.
- ✓ Main structural parts made of AISI304 stainless steel.
- ✓ Parts in contact with the product made of AISI316L stainless steel.
- ✓ Suitable for foaming products.
- ✓ Available in ATEX version.



TECHNICAL SPECIFICATIONS

Approximate nominal production	15 IBC/hour (1.200 liters)
Approximate weight	500Kg
Weight scale resolution	50gr
Power	Electrical: 240V, 50-60Hz, <1Kw Pneumatic: 6Bar, 40 NI/Cycle approx.
Work temperature	-10°C a +45°C
Product temperature	0°C a +80°C
Movie	https://www.youtube.com/watch?v=KnkVuJ8dLDQ

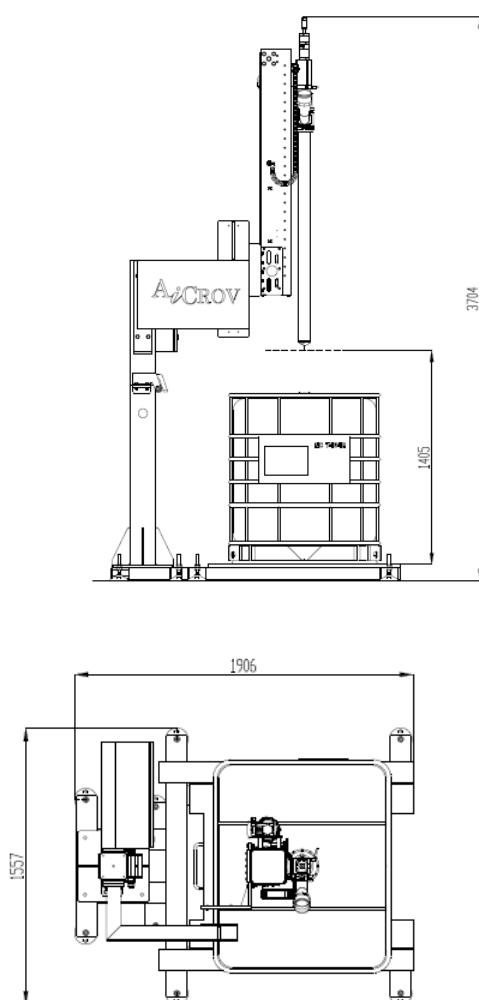

**Technical details non constructive. The final technical information Will be provided after placing the Purchas Order..*