



RD52HL

WEIGHT REPEATER
WITH HIGH-INTENSITY DISPLAY

RD52HL

WEIGHT REPEATER WITH HIGH-INTENSITY DISPLAY



Declaration
of Conformity



IP65 stainless
steel



SIMPLE AND VERSATILE

The **RD52HL** high intensity weight repeater allows large weight display distances, both indoors and outdoors.

Ideal for supplementary weight display in a wide range of applications.



STRENGTHS

- HIGH-INTENSITY DISPLAY
- IP65 STAINLESS STEEL ENCLOSURE
- CAN BE CONNECTED DIRECTLY TO WEIGHING TERMINAL VIA SERIAL CABLE

MAIN FEATURES

- High-intensity display
- Can be connected directly to weighing terminal via serial cable
- Easy to read from long distances from 25 to 30 m
- IP65 stainless steel enclosure
- Supplementary weight indications in accordance with OIML regulations
- Weights and measures approved in accordance with Directive 2014/31/UE





TECHNICAL SPECIFICATIONS

- Power supply: 100/240 VAC +/- 20% 50/60 Hz 50 mA
- Power cord length: 4 m
- Operating temperature: from -10 to +50 °C
- Display height: 60 mm
- Available interfaces
 - > EIA RS232 for connection up to 15 m
 - > EIA RS422 for longer connections

OPTIONALS

- Stainless steel protective shield
- Stainless steel fastening bracket

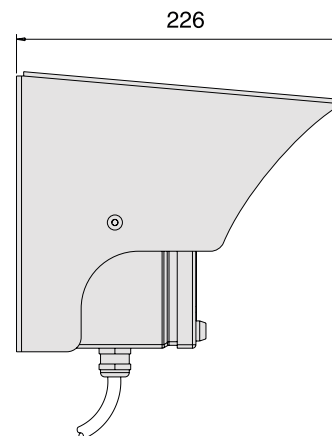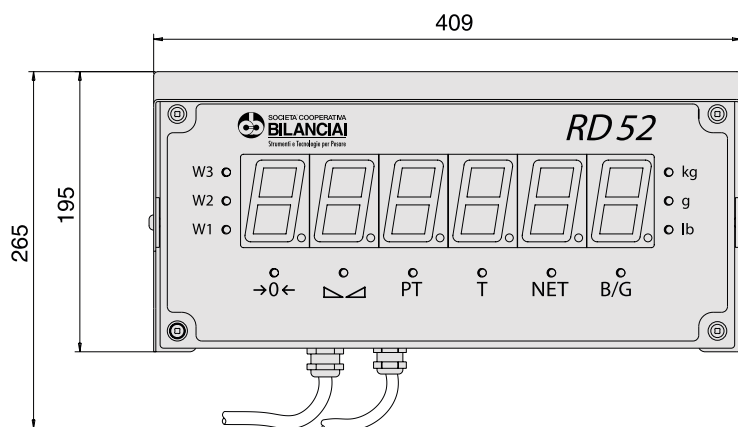



Società Cooperativa Bilanciai Campogalliano
41011 Campogalliano (MO) Italy
Via S. Ferrari, 16 - Ph. +39 059 893611
Customer Service - Ph. +39 059 893612
www.coopbilanciai.it - info@coopbilanciai.it



In order to technologically improve its production, the company reserves the right to make changes and modifications to the products shown in the above pictures at any time and without prior notice.
11/2023 Edition